



SPECIFICATION

P/N:OP-2LSM7015-3 1.5W

110
LM/W




Application:

- 3D illumination LED letters with Depth 60-250MM
- Light box with Depth 60-250MM


Features:

- Aluminum PCB
- Light decay <3% for 6000hrs
- CRI>80
- 3-step MacAdam ellipse
- HB fire safety level
- IP65 waterproof
- Cutable every module
- 3 years warranty

Beam Angle:160°

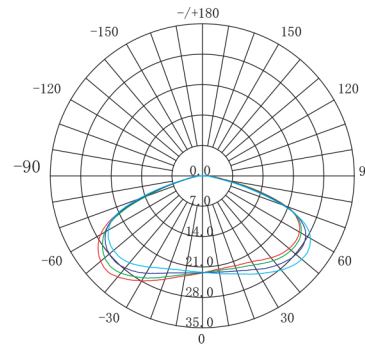

Dimensions:


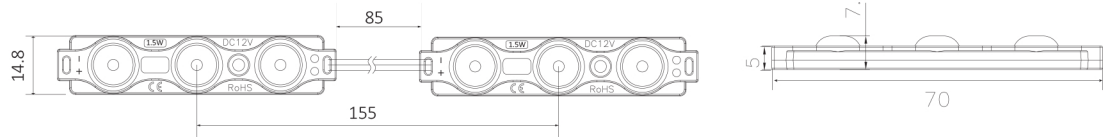


Unit:MM


Order INFO and Parameter:

Part No.	Voltage	Power/pc	Lumen/pcs	LED Type	Ra	Housing material	Dimension	Working TEMP	Available Color
OP-2LSM7015-3	DC12V	1.5W	150LM	SMD2835	>80	PVC	70*14.8*7.1mm	-25°C to +60 °C	3000K/7000K/12000K

Installation Reference:



Depth(H)	Dx	Dy	Qty/m ²	Power/m ²	Illumination
120MM	180MM	180MM	36PCS	54W	2200LUX
150MM	200MM	200MM	25PCS	38W	1700LUX
200MM	200MM	200MM	25PCS	38W	1500LUX
250MM	200MM	200MM	25PCS	38W	1200LUX

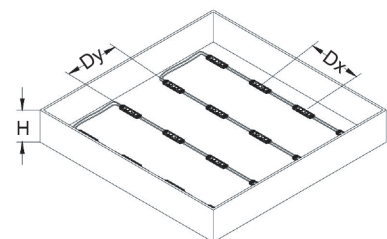

Packing Details:

Packing	Qty/chain	Qty/bag	Qty/carton	Carton Size
Qty	20pcs	200pcs	2000pcs	45*31*29cm
Weight	0.18KG	1.8KG	19.5KG	