



SPECIFICATION

P/N:OP-HSM4028-1




Application:

- 3D illumination LED letters with Depth 50-300MM
- Light box with Depth 50-300MM


Features:

- 160° wide viewing angle
- Light decay <3% for 6000hrs
- CRI>70
- 3-step MacAdam ellipse
- HB fire safety level
- IP65 waterproof
- Cutttable every module
- 5 years warranty

Beam Angle:160°

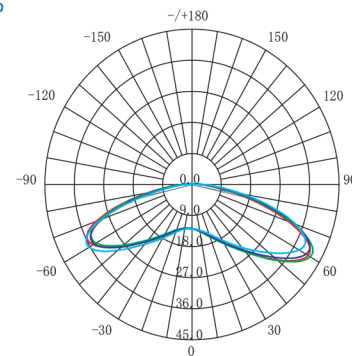



Dimensions:

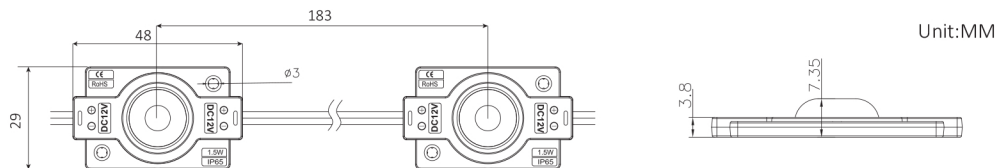


Order INFO and Parameter:

Part No.	Voltage	Power/pc	Lumen/pcs	LED Type	Ra	Housing material	Dimension	Working TEMP	Available Color
OP-HSM4028-1	DC12V	1.5W	145LM	EMC 3030	>70	ABS	48*29*7.35mm	-25°C to +60 °C	3000K/6000K/12000K

Installation Reference:



Part No.	Depth(H)	Dx	Dy	Qty/M ²	Power/M ²	Illumination
OP-HSM4028-1	100mm	150mm	150mm	48pcs	72W	1780lux
	150mm	200mm	200mm	25pcs	38W	1350lux
	180mm	200mm	200mm	25pcs	38W	1210lux
	200mm	200mm	200mm	25pcs	38W	1090lux

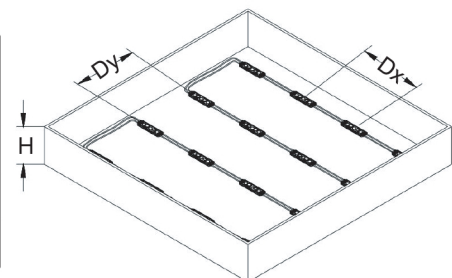

Packing Details:

Packing	Qty/chain	Qty/bag	Qty/carton	Carton Size
Qty	20pcs	200pcs	2000pcs	54*32*43cm
Weight	0.22KG	2.2KG	23.5KG	