



SPECIFICATION

P/N:OP-2LSM4517-2

150
LM/W




Application:

- 3D illumination LED letters with Depth 30-200MM
- Light box with Depth 30-200MM


Features:

- 3:1 Lens with wide viewing angle
- Light decay <3% for 6000hrs
- CRI>80
- 3-step MacAdam ellipse
- HB fire safety level
- IP67 waterproof
- Cutttable every module
- 5 years warranty

Beam Angle:170°

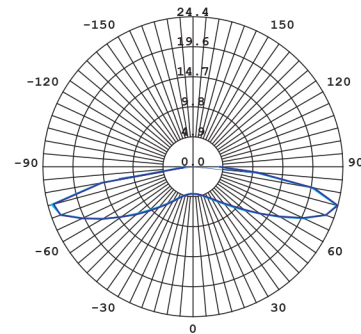



Dimensions:

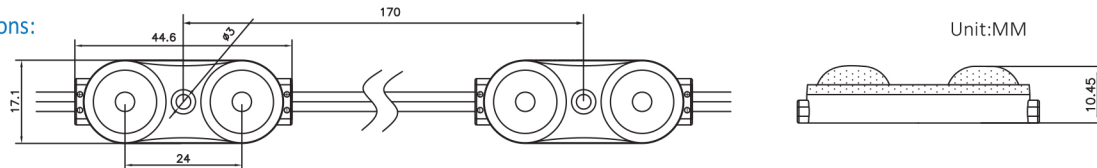


Order INFO and Parameter:

Part No.	Voltage	Power/pc	Lumen/pcs	LED Type	Ra	Housing material	Dimension	Working TEMP	Available Color
OP-2LSM4517-2	DC12V	0.72W	108LM	SMD2835	80	ABS	44.6*17.1*10.5mm	-25°C to +60 °C	3000K/7000K/12000K

Installation Reference:



Depth(H)	Dx	Dy	Qty/m ²	Power/m ²	Illumination
80MM	180MM	180MM	30PCS	22W	1650LUX
100MM	250MM	250MM	16PCS	12W	1080LUX
120MM	250MM	250MM	16PCS	12W	880LUX
150MM	250MM	250MM	16PCS	12W	790LUX

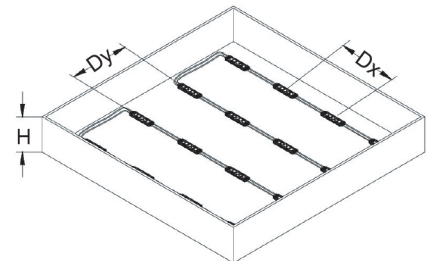

Packing Details:

Packing	Qty/chain	Qty/bag	Qty/carton	Carton Size
Qty	20pcs	200pcs	2000pcs	54*32*43cm
Weight	0.2KG	2.05KG	21.5KG	